

Jawar Nord

Four-layer chimney system designed to exhaust gases from devices run on solid fuels in energy-efficient construction.


PELLET



WOOD



- Pre-insulated pipes delivered to customer
- First Polish block chimney designed to exhaust gases and supply air to fireplaces
- Does not require any additional air supply from outside of building
- Designed to exhaust gases in range of temperatures 60-600°C
- The only chimney system in Poland, which may be placed next to flammable components (T400 G00)
- Resistant to sootfire
- Chimney system marked with CE according to standards
EN 13063-1 T600 NI D 3 G50
EN 13063-1 T400 NI D 3 G00
EN 13063-3 T600 NI D 3 G50
EN 13063-3 T400 NI D 3 G00

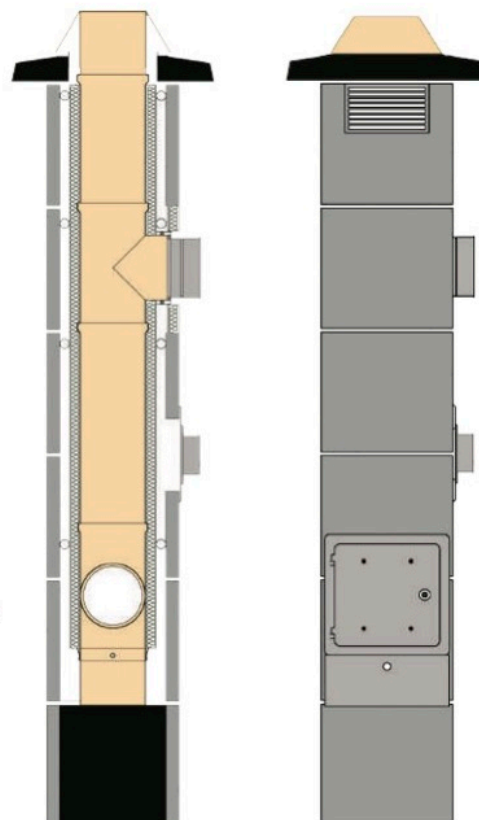

One channel	Diameter [cm]	Measure [cm]	Weight [kg/mb]	With Ventilation	Diameter [cm]	Measure [cm]	Weight [kg/mb]
	ø 16	36x36x33	76		ø 16+W	50x36x33	99
	ø 18	36x36x33	78		ø 18+W	50x36x33	101
	ø 20	40x40x33	89		ø 20+W	50x36x33	104
					ø 16+2W	54x36x33	117
					ø 18+2W	54x36x33	120

