


AQUAPHOR®

water filters

Three way kitchen faucet model C126

Instruction manual

Three way kitchen faucet model number C126 to be used with tap water and filtered tap water with other purifiers, which are connected to incoming tap water.

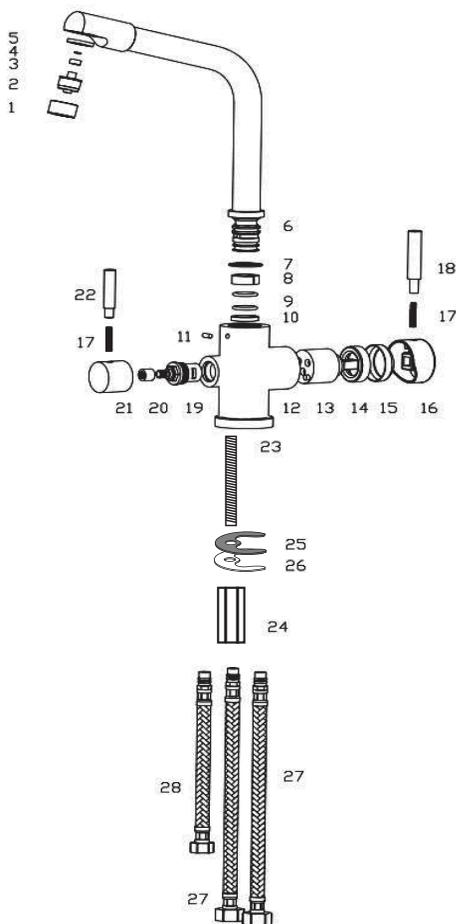

1. Cap
2. Aerator
- 3-4. Small diameter layer
5. Large diameter layer
6. Spout
7. Wear ring
8. Seal
9. O-ring, 2 pieces
10. Seal
11. Allen screw
12. The body of the mixer
13. A cartridge for hot and cold water
14. Threaded bush
15. Decorative hood
16. Cover
17. Allen screw for mounting handles
18. Handle Large
19. Crane bush
20. Plastic sleeve
21. Small housing
22. Handle Small
23. Threaded rod
24. Screw nut
25. Gasket
26. Shaped collar
27. Flexible connection hoses for cold and hot water
28. Flexible connection hose for purified water

Demonstrated in **figure 1**.

Technical Specifications

Maximum water pressure	0.63 MPa
Cold water temperature	+4...+ 38 °C
Hot water temperature	to 75 °C
Temperature of filtered water	4...+ 38 °C
Faucet assembly Weight	2.01 kg

Included in content

Faucet assembly	1 pc.
Flexible connection hoses for cold and hot water (27), L = 600 mm, G1/2 "	2 pcs.
Flexible connection hose for purified water (28), L = 370 mm, G3/8 "	1 pc.
Threaded rod (23)	1 pc.
Screw nut (24)	1 pc.
Gasket (25)	1 pc.
Shaped collar (26)	1 pc.
Adapter for tube JG 1/4 "	1 pc.
Manual	1 pc.
Package	1 pc.

Installation

Please read these instructions before attempting to install the faucet.

1. Drill a hole in the sink (countertop) diameter of 35 mm.
2. Screw the flexible hoses into the holes (3 pcs.), located at the bottom of the faucet body (12), guided by the colour designation liner and instructions in Figure 2. To connect Water purifiers that use tube JG 1/4 ", use an adapter (included).
3. Screw threaded rod (23) to the internal thread of the faucet body (12).
4. Insert hoses and then the threaded rod (23) in the aperture of the kitchen sink.
5. From the bottom of the sink put on the gasket (25) and shaped collar (26) on a threaded rod and screw on the screw nut (24).
6. Place the faucet in a comfortable position and tighten the screw nut (24) to the end.

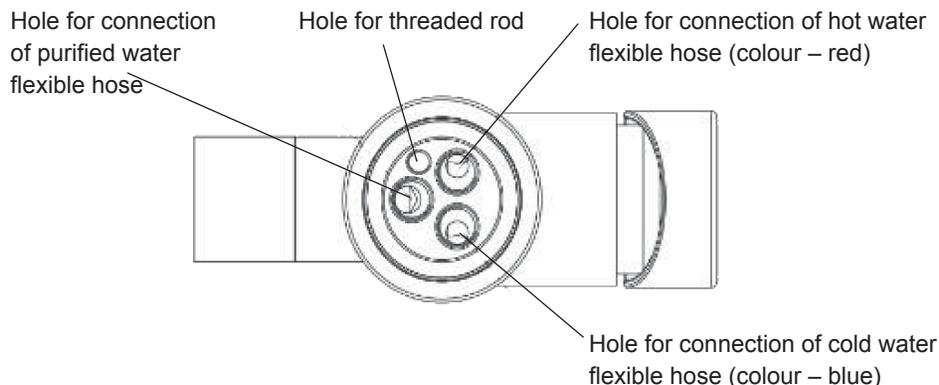


Figure 2. Flexible hoses and threaded rod connecting

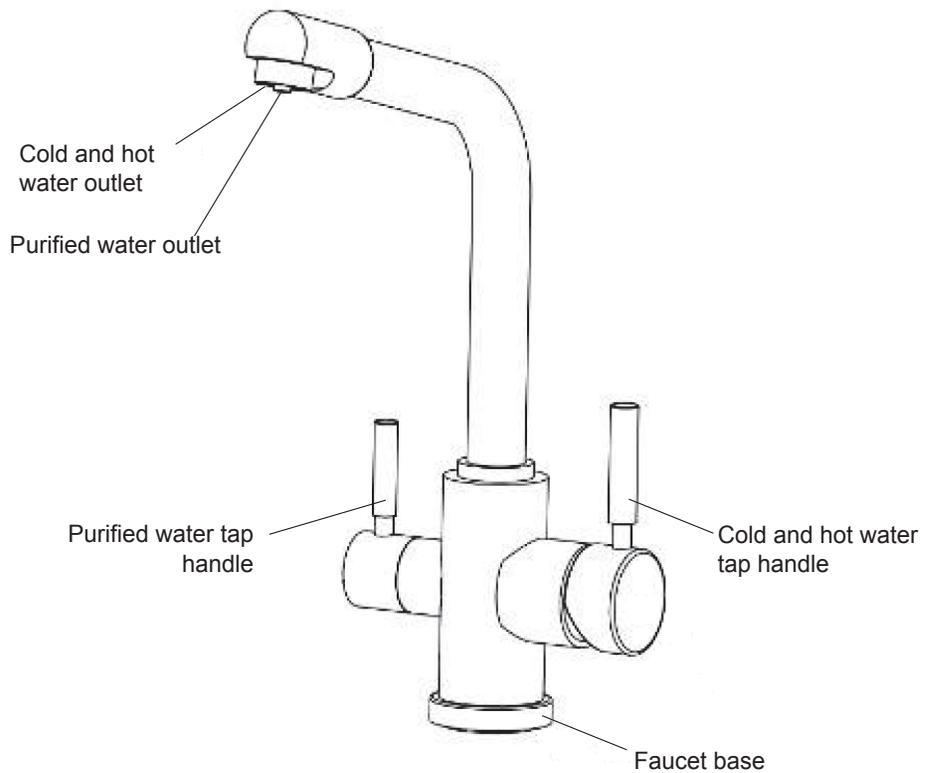


Figure 3. Faucet assembly

Recommendations for the Use and Care

- Wipe the product with a soft cloth dampened with soapy water.
- Do not use abrasive cleaners to clean the surfaces of the faucet, as well as caustic chemicals and solvents.
- When using the product in areas with hard water or water with a high mineral content it is recommended to prevent salt deposits on the faucet's surface.
- Rinse the aerator frequently.

Disposed of in accordance with environmental, sanitary and other requirements established by national standards in the field of environmental protection.

Service life and warranty

Service Life – 5 years from the date of sale, the end of the life of a mixer should be replaced. Mixer operation after the end of life can cause harm to the consumer's property or other persons. The shelf life of the faucet prior to the start of operation - no more than 3 years from the production date specified in this sheet at a temperature of +5 to +38 °C without breaking the package. Warranty period of operation of the faucet – 1 year from the date of sale. Warranty is not valid if:

- The requirements specified in this manual are not followed;
- In violation of installation and setup of the rules set out in this manual;
- Manual is lost with the manufacturer's date or sale the warranty is voided.

Kitchen faucet is lead-free.

The manufacturer is entitled to upgrade design of the faucet without making a prior note in the certificate.

AQUAPHOR®

Manufacturer:
Westaqua-Invest OÜ,
L. Tolstoi 2A, Sillamäe,
40231, Eesti.
www.aquaphor.com

Date of manufacturing and quality control

C126

Date of purchase / Retailer's stamp