




OHI

Pumps equipped with 3-speed motors, enabling adjustment of operating parameters depending on the user's needs. The pumps are available with a bronze or cast iron body. Due to the design and high quality of the materials used, the pumps are very quiet.

All OHI pumps are certified by the Polish National Institute of Hygiene.

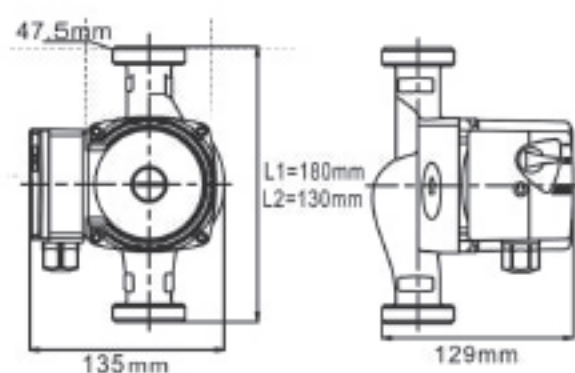

Model	Gear	Head (m)	Flow (l/min)	Motor power (W)	Connector diameter / Screw connection diameter (inch)	Connector spacing (mm)
OHI 15-60/130	1	2,2	24	46	1 / 3/4 (1/2)	130
	2	3,9	37	63		
	3	5,1	55	93		
OHI 25-40/130 OHI 25-40/180	1	2,2	27	38	1 1/2 / 1	130 180
	2	3,2	38	53		
	3	4	55	71		
OHI 25-60/130 OHI 25-60/180	1	2,8	27	46	1 1/2 / 1	130 180
	2	4,7	39	63		
	3	5,6	57	93		
OHI 32-60/180	1	2,2	31	46	2 / 1 1/4	180
	2	3,9	47	63		
	3	5,4	69	93		
OHI 25-80/180	1	5	50	150	1 1/2 / 1	180
	2	7,4	73	220		
	3	8	115	270		
OHI 32-80/180	1	3,9	62	150	2 / 1 1/4	180
	2	6,6	94	220		
	3	7,7	142	270		