

EAN: 6414150078927

www.oras.com/ee/products/oras/product/1038F



K  rge p  ratable jooksuboru. Jooksuboru p  rdenurga tehaseade 120   (v  imalus piirata 0  /60  ).
Temperatuuri ja vooluhulga piiramisv  imalusega seadeosa. F = painduvad   hendustorud.

- K  k
- Kangseigistid
- DeckMounted
- Kroom
- Suundjooksuboru
-   husti
- Limitation option for maximum flow-rate
- Painduv   hendustoru
- 3S-Installation

Tehnilised andmed

Vooluhulk


Vooluhulk 300 kPa	0.21 l/s
R��hukadu vooluhulgal (0.2 l/s)	270 kPa



Tehnilised omadused

Kuum vesi	max. +80��C
Kasutus surve	50 - 1000 kPa
��henduse m���t	G1/2
ItemProjection	178 mm
ItemMaterial	brass


M   rused

EN standard	EN 817
H���leklass	I (ISO 3822)

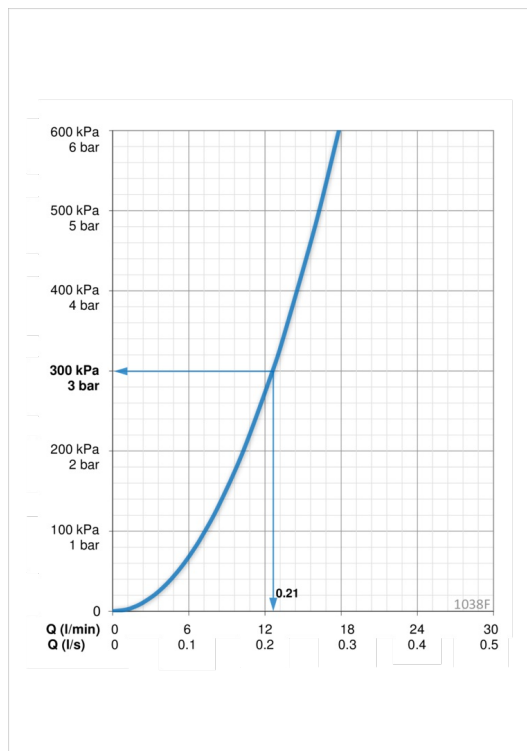

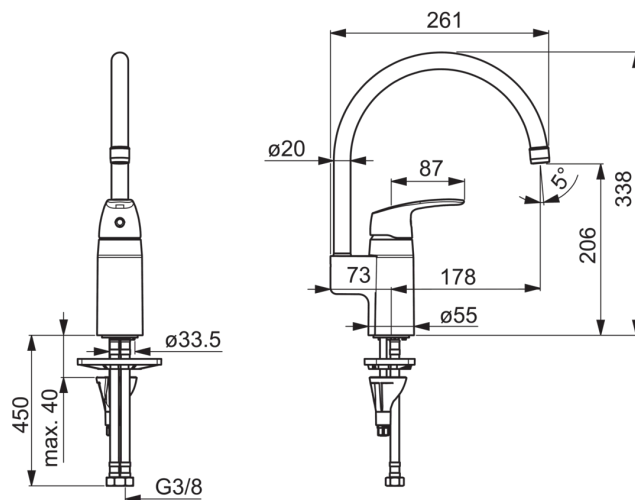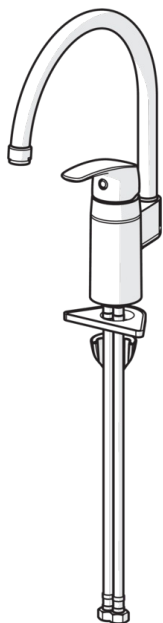

Varuosad

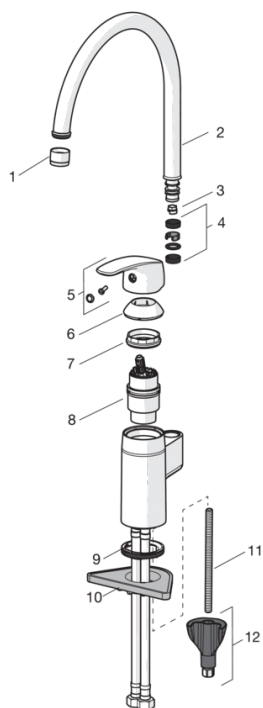

SP1038F

	Kood
01	232201
02	159695V
03	159667V
03	159667/10
03	159670/10
04	159499
05	602502V
06	602589V
07	158726
08	158890
09	601971V
10	158825
11	1000780V
12	602610V