

TOPE PRO
MORA

TOPE 

MORA95_SU_B_40W_LED_3800	IP20	IK03		CE	
--------------------------	------	------	--	----	--

TopE article 6004000032

Data sheet


A versatile, circular luminaire for surface mounting. Electronic, fixed output control gear. Class I electrical, IP20. Body: steel, black (RAL 9005). Diffuser: acrylic opal. Connection via push wire terminal blocks. Supplied with adjustable wire suspension mounting, with quick-locks included. Complete with 3000K LED.



Dimensions: Ø500x90mm
Total power: 38,7W
Luminaire luminous flux: 3798 lm
Luminaire efficiency: 98,14 lm/W
Weight: 3,2 kg

Light source: LED
Color rendering index min.: >80
Correlated colour temperature: 3000 Kelvin
Rated median useful life: 50000 L90 25°C
Ballast: Zx HS
Luminaire input power: 40W
Dimming: Fixed output

All values are rated values. TopE Lighting uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Colour temperature is subject to a tolerance of up to +/-150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C. In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint

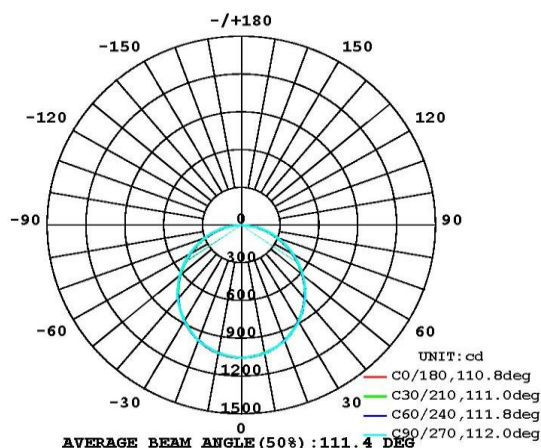

TopE Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.

© TopE Lighting