

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

for all common pressfitting systems

Select REMS pressing tongs/ REMS pressing rings yourself!

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22V ACC with 45 kN thrust force, see the table below. Adapter tongs (page 212) required for driving REMS (PR) pressing rings. All pressing tongs marked with * have an optional connection (Patent EP 1 223 008, Patent US 6,739,172) for manual drive through the radial press REMS Eco-Press. Read and observe the instructions for use and assembly instructions of the system provider/manufacturer.

REMS pressing tongs (PZ-2B)

REMS pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFlz, VMPz pressing tongs with teeth prevent formation of burr on the pressfitting (Patent EP 2 027 971).

REMS pressing tongs (PZ-4G)

REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (PZ-S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressfitting.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments (Patent EP 2 080 592). Adapter tongs required, see page 212.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments. Adapter tongs required, see page 212. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressfitting.

REMS pressing rings 45° (PR-2B)

REMS pressing ring 45° (PR-2B), with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access by 45° inclination (Patent EP 2 774 725). Adapter tongs required, see page 212.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Confirmation of suitability

See page 213.

Hold-Harmless and Indemnification Agreement

See page 214.




Patent EP 1 223 008
Patent US 6,739,172



German Quality Product



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)



REMS pressing rings (PR-3S)




REMS pressing rings (PR-3B)



REMS pressing rings 45° (PR-2B)
Patent EP 2 774 725

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

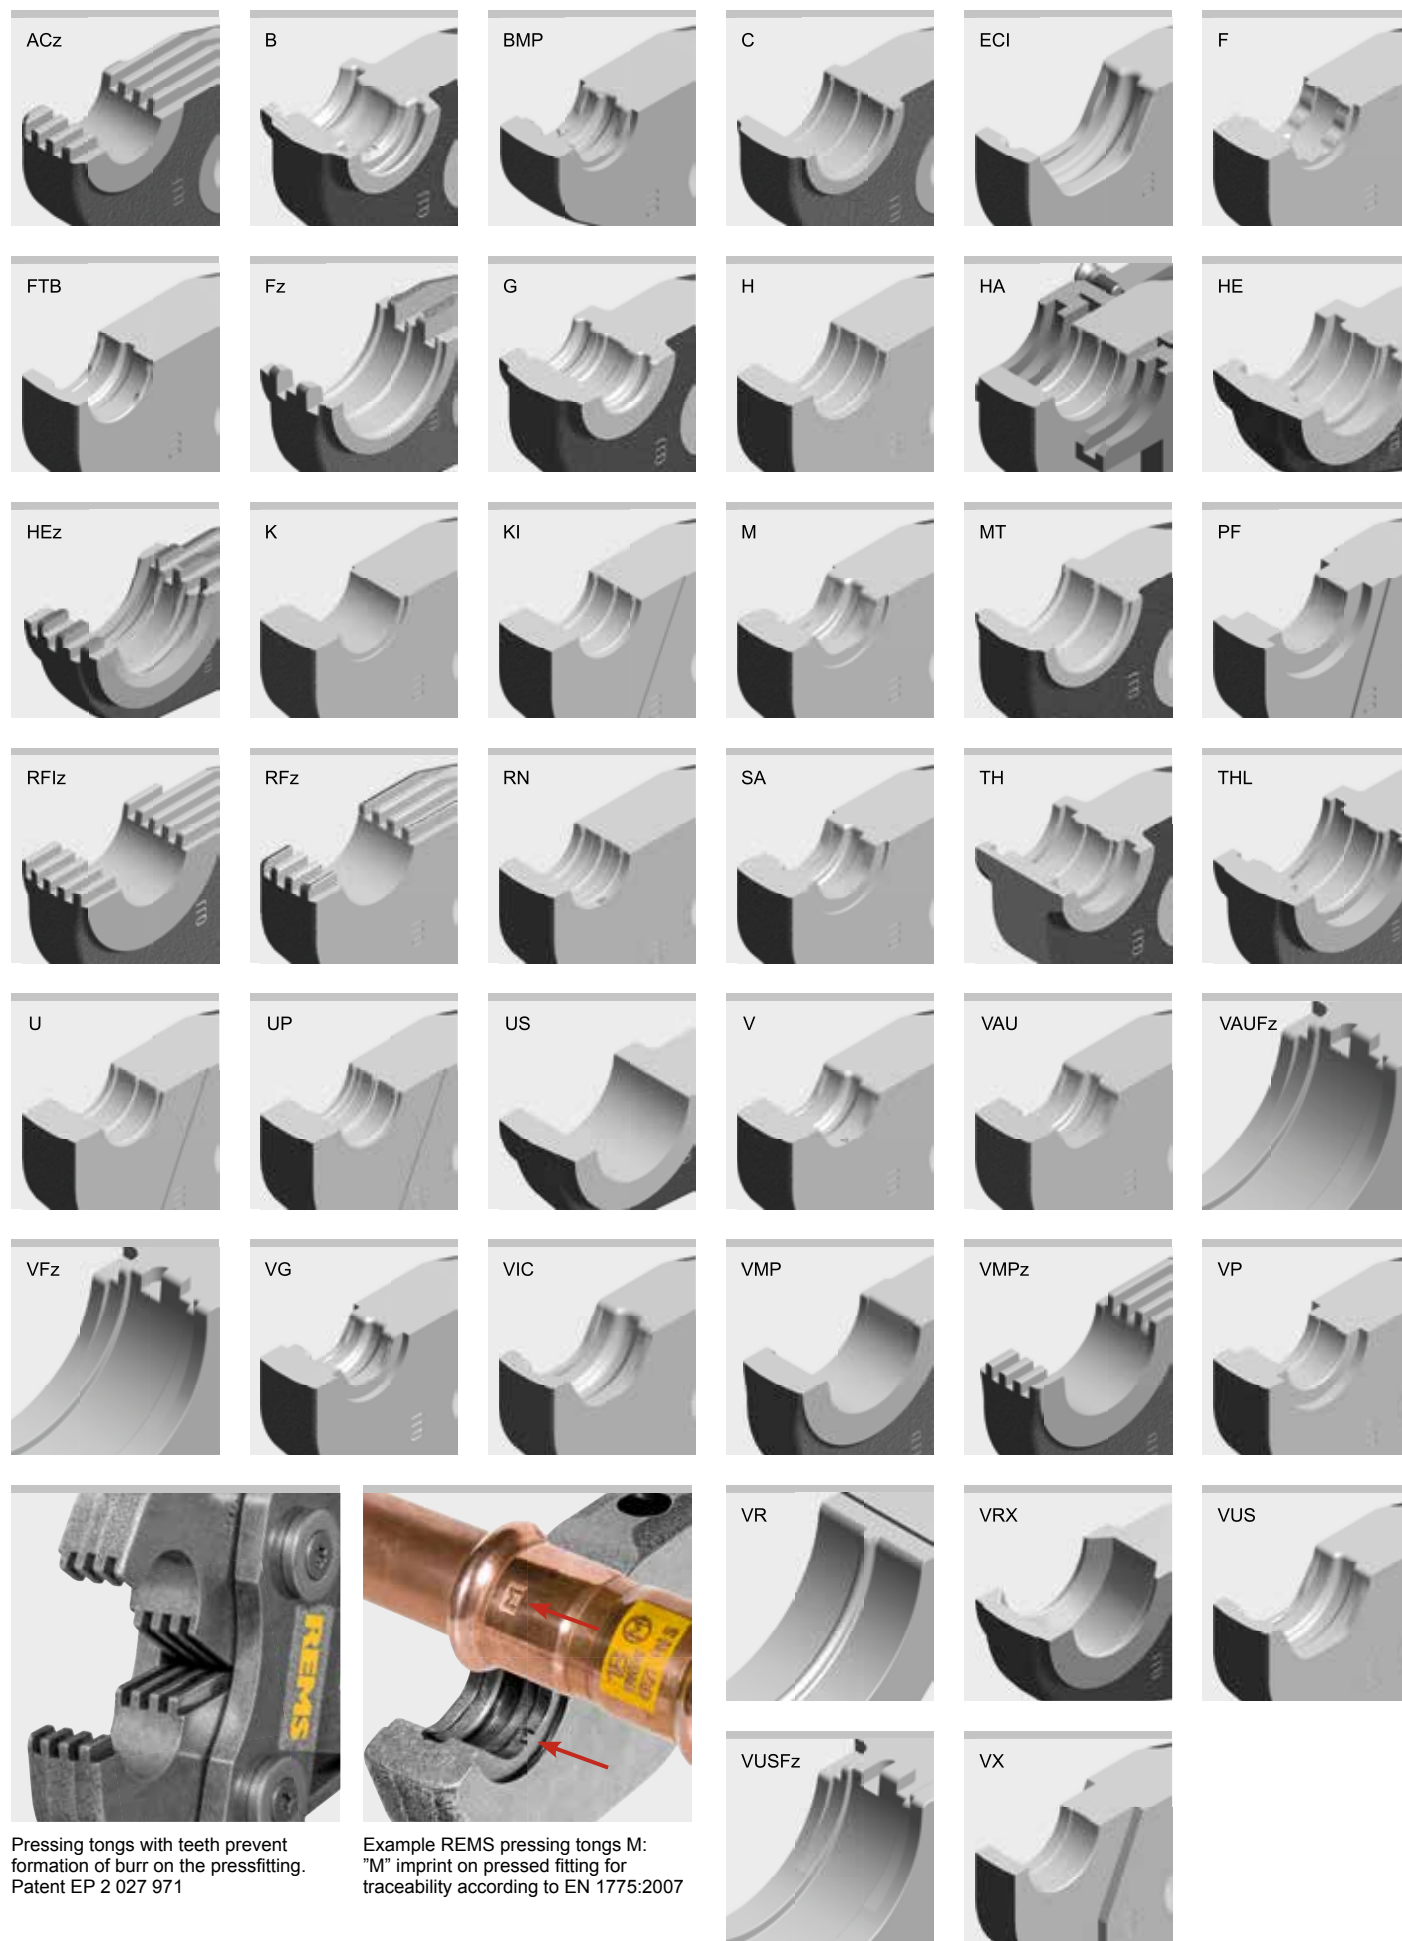

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
A			
AC-FIX PRESS (Global Piping Systems)	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	VX 16*		571635
	VX 20*		571640
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
AC-FIX PRESS DUO (Global Piping Systems)	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	H 16*		570320
	H 18*		570340
	H 20*		570350
AC-FIX PRESS-MULTI (Global Piping Systems)	H 25*		570360
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	H 16*		570320
ACOME ACOPEX ALU	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 32		570785
	ACz 12*		572642
	ACz 16*		572644
ACOME MT	ACz 20*		572646
	ACz 25		572648
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
AHLSELL A-press elförzinkad M	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
AHLSELL A-press elförzinkad V	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	M 12		570100
	M 15		570110
AHLSELL A-press koppar M	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
AHLSELL A-press koppar V	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
AHLSELL A-press koppar V	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
AHLSELL A-press rostfritt	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
AIRBEL PRESSCLIM	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
AIRBEL SERTINOX	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
ALB Sistema Multicapa	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
ALB Sistema Multicapa Gas	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
	U 18*		570770
	U 20*		570775
ALTECH Altech	C 26*		570750
	U 32		570785
	U 40		570790
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
APE MULTYGAS Serie AP Gas	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
APE Serie AP	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
APE Serie APL	H 16"		570320
	H 18"		570340
	H 20"		570350
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	U 16"		570765
	U 18"		570770
	U 20"		570775
AQUATECHNIK Press-fitting metal	H 16"		570320
	H 20"		570350
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16"		570765
	U 20"		570775
	U 32		570785
AQUATECHNIK Universal	H 16"		570320
	H 20"		570350
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	U 16"		570765
	U 20"		570775
	C 26"		570750
	U 32		570785
ARKA DUROsystem	H 16"		570320
	H 20"		570350
	H 25"		570360
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 25"		570495
	TH 26"		570475
	TH 32		570480
	U 16"		570765
	U 20"		570775
Aschl NIR	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
ASSOTHERM IPC-RAC Carbon Steel	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
ASSOTHERM IPI-RAX Inox	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
ASSOTHERM IPI-RAX Inox Gas	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
ASSOTHERM IPM-Multistrato	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	H 16"		570320
	H 20"		570350
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16"		570765
	U 20"		570775
ASSOTHERM IPR-RRA Copper	C 26"		570750
	U 32		570785
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
ASSOTHERM IPR-RRA Copper Gas	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ¾"		571450
	US ½"		571455
	US ¾"		571460
	US 1"		571465
	US 1 ½"		571470
	US 1 ½"		571475
	US 2"		571477

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
AYOR FIXOCONNECT Press	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	U 16*		570765
	U 20*		570775
	U 25*		570780
AYOR FIXOMULTIX	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
AYOR SOMATHERM FOR YOU -1	H 16*		570320
	H 20*		570350
	H 26*		570370
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	U 16*		570765
	U 20*		570775
AYOR SOMATHERM FOR YOU -2	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	U 16*		570765
	U 20*		570775
B			
Bampi BALPEX serie LP	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
Bampi BALPEX serie MP	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
Bampi BALPEX Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
BARBI EASYPRESS (Industrial Blansol)	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
BARBI MULTIPEX (Industrial Blansol)	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
BEGETUBE/ IVAR	B 14*		570845
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	Fz 75 (PR-3B)	Z4	572830
Béné inox Série 41	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
BRASELI GPF GAS	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
BRASELI Pressfitting PE-X	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
BRASELI Pressfitting Multicapa	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
Brass Form Master Press	H 16*		570320
	H 18*		570340
	H 20*		570350
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	U 16*		570765
	U 18*		570770
	U 20*		570775
Brass & Fittings PRESSMAN MultiPress	RFz 16*		571325
	RFz 18*		571327
	ACz 20*		572646
	RFz 25		571335
	RFz 32		571340
Brass & Fittings PRESSMAN RetiPress	RFz 16*		571325
	RFz 18*		571327
	ACz 20*		572646
	RFz 25		571335
	RFz 32		571340
BRASSTECH MULTItermoSAN Brasspress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
Cello Products >B< Press	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785
C			
Cello Products >B< Press	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1½" (OD 34,9 mm)		571785
	VUS 1¾" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
CGR DYNAFLU multicouche	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
CGR DYNAFLU multicouche	H 12"		570300
	H 16"		570320
	H 20"		570350
	H 25"		570360
	RFz 12"		571320
	RFz 16"		571325
	RFz 20"		571330
CHIALI CHIALIPEX	RFz 25		571335
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
Climatek Clima Therm	TH 63 (PZ-S)		572405
	TH 14"		570455
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
Climatrix Climatrix Rhinopex	H 40 A (PZ-4G)		570695
	H 16"		570320
	H 20"		570350
	U 16"		570765
	U 20"		570775
	TH 14"		570455
	TH 16"		570460
ClouSet	TH 18"		570465
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
Comap PEX Press	RFz 12"		571320
	RFz 16"		571325
	RFz 20"		571330
	RFz 25		571335
	TH 14"		570455
	TH 16"		570460
	TH 18"		570465
Comap Multiskin	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
Comap Multiskin Gas	U 16"		570765
	U 20"		570775
	U 32		570785
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
COMISA Press System	THL 32		570487
	U 16"		570765
	U 20"		570775
	U 32		570785
	TH 14"		570455
	TH 16"		570460
	TH 18"		570465
COMISA Press System Gas	TH 20"		570470
	TH 25"		570495
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
COMISA Press System Gas	H 14"		570310
	H 16"		570320
	H 18"		570340
	H 20"		570350
	H 26"		570370
	H 32		570380
	B 14"		570845
COMISA Press System Gas	B 16"		570850
	B 18"		570855
	B 20"		570860
	B 26		570870
	B 32		570880
	TH 16"		570460
	TH 20"		570470
COMISA Press System Gas	TH 26"		570475
	TH 32		570480

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
CONEL CONNECT MULTI	F 16"		570717
	F 20"		570727
	F 26"		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
(DN 26)	F 32 45° (PR-2B)	Z1	574556
	H 16"		570320
	H 20"		570350
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 20"		570470
CONEL CONNECT MV2	TH 26"		570475
	TH 32		570480
	U 16"		570765
	U 20"		570775
	U 25"		570780
	U 32		570785
	VP 16"		570910
Conex Bänninger >B< Flex	VP 20"		570915
	VP 32		570925
	F 16"		570717
	F 20"		570727
	F 26"		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
Conex Bänninger >B< MaxiPro	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
Conex Bänninger >B< Press	F 16"		570717
	F 18"		570720
	F 20"		570727
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 32 45° (PR-2B)	Z1	574556
Conex Bänninger >B< Press	H 16"		570320
	H 18"		570340
	H 20"		570350
	H 25"		570360
	H 32		570380
	RFz 16"		571325
	RFz 18"		571327
Conex Bänninger >B< Press	RFz 20"		571330
	RFz 25		571335
	RFz 32		571340
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
	TH 25"		570495
Conex Bänninger >B< Press	TH 32		570480
	U 16"		570765
	U 18"		570770
	U 20"		570775
	U 25"		570780
	U 32		570785
	BMP ¼"		571700
Conex Bänninger >B< Press	BMP ¾"		571702
	BMP ½"		571704
	BMP ¾"		571706
	BMP ¾"		571708
	BMP ¾"		571710
	BMP 1"		571712
	BMP 1½"		571714
Conex Bänninger >B< Press	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
Conex Bänninger >B< Press	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
Conex Bänninger >B< Press	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Conex Bänninger >B< Press Carbon	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Conex Bänninger >B< Press Gas	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Conex Bänninger >B< Press Inox	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Conex Bänninger >B< Press Solar	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Conex Bänninger >B< Press XL carbon	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
Conex Bänninger >B< Press XL copper	VFz 64,0 (PR-3B)	Z5	572815
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817
	VFz 108,0 (PR-3B) ⁶⁾	Z5	572818
Conex Bänninger >B< Press XL stainless	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
Conex Bänninger >B< Press XL red brass	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
D			
Debrunner Acifer d-a Presssystem C-Stahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
DIWAsystems	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
DUOFIL MKSYSTEM	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
DW Verbundrohr multitubo systems	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
E			
EBRILLE Isomonflex	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	H 26*		570370
	TH 26*		570475
	U 32		570785
EBRILLE Monflex	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	H 26*		570370
	TH 26*		570475
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
EFFEBI PRESSTIGE	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
EFFEBI TOF-GAS MULTIPINZA	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
	U 20*		570775
	U 32		570785
EFFEBI TOF MULTIPINZA	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EFIELD MULTILAYER PRESS DINGAS	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
EFIELD MULTILAYER PRESS WATER	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	VUS ¾" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
Elkhart APOLLOXPRESS LD-C Fittings Copper	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
EMMETI GERPEX- FIVPRESS	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	H 16*		570320
	H 20*		570350
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	EMPUR	TH 14*	
TH 15*			570457
TH 16*			570460
TH 17*			570462
TH 20*			570470
TH 25*			570495
EURACCORDI SYCPRESS STAINLESS STEEL PRESS FITTINGS	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
EURACCORDI SYCPRESS CARBON STEEL PRESS FITTINGS	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EUROTUBI	M 15		570110
EUROPA	M 18		570120
Inox Pressfitting	M 22		570130
System M-Profile ¹⁾	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Evans	VAU 15 (½")		572687
Components	VAU 20 (¾")		572689
Presslok	VAU 25 (1")		572691
	ECI 1½"		571932
	ECI 2" (PZ-4G)		571934
	ECI 2½" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579104
	ECI 3" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579105
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106
F			
FAR Rubinetterie	TH 14"		570455
PRESSFAR	TH 16"		570460
	TH 17"		570462
	TH 18"		570465
	TH 20"		570470
	TH 25"		570495
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	H 14"		570310
	H 16"		570320
	H 18"		570340
	H 20"		570350
	H 26"		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 14"		570760
	U 16"		570765
	U 18"		570770
	U 20"		570775
	U 25"		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
F.B.Q. BARONIO	V 12		570107
BQ press	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
F.B.Q. BARONIO	V 15		570115
BQ press	V 18		570125
carbon steel	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45kN 22V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
F.B.Q. BARONIO BQ press gas	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
Fercofloor DUO Press FERCO PEX	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
Fercofloor DUO Press MULTIFER	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
FILINOX Filpress	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
FILINOX Instalpress Steel	U 50		570795
	U 63 (PZ-S)		572365
	FTB 15		571432
	FTB 18		571434
	FTB 22		571436
	FTB 28		571438
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110
FILINOX Instalpress Inox	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110
Fittings Estándar ECO-PRESS	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
Fittings Estándar MULTICAPA	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
Fittings Estándar PE-X	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 32		570480
	TH 32		570480

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FORNARA ForPress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
FRABO FRABOPRESS 316 GAS M	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
FRABO FRABOPRESS 316 GAS V	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
FRABO FRABOPRESS 316 M	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
FRABO FRABOPRESS 316 V	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	M 15		570110
	M 18		570120
FRABO FRABOPRESS 316 V	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
FRABO FRABOPRESS CHROME	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
FRABO FRABOPRESS C-STEEL M	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
FRABO FRABOPRESS	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
FRABO FRABOPRESS	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FRABO	V 12		570107
FRABOPRESS	V 15		570115
C-STEEL V	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
FRABO	M 12		570100
FRABOPRESS	M 15		570110
GAS M	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
FRABO	V 12		570107
FRABOPRESS	V 15		570115
GAS V	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
FRABO	V 12		570107
FRABOPRESS	V 15		570115
KOMBI	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
FRABO	M 12		570100
FRABOPRESS M	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
FRABO	V 15		570115
FRABOPRESS	V 18		570125
SOLAR	V 22		570135
	V 28		570145
	V 35		570155
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FRABO	M 22		570130
FRABOPRESS TS	M 22 45° (PR-2B)	Z1	574526
	V 22		570135
	V 22 45° (PR-2B)	Z1	574508
FRABO	V 12		570107
FRABOPRESS V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Fränkische	B 16*		570850
alpeX-duo	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
Fränkische	F 16*		570717
alpeX-duo XS	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
Fränkische	F 16*		570717
alpeX F50 PROFi	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
(DN 26)	U 25*		570780
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 32		570925
Fränkische	F 20 ²⁾		570727
alpeX-gas ²⁾	F 26 ²⁾		570730
	F 32 ²⁾		570735
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
Fränkische	Fz 40		570742
alpeX L	Fz 50		570747
	F 63 (PZ-S)		572385
	Fz 75 (PR-3B)	Z4	572830

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
G			
gabotherm H+S	TH 10"		570467
	TH 12"		570452
	TH 14"		570455
	TH 15"		570457
	TH 16"		570460
	TH 17"		570462
	TH 18"		570465
	TH 20"		570470
	TH 25"		570495
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
Gallagher USA YogaPipe ACR	H 12" (1/4")		570300
	U 14" (3/4")		570760
	U 16" (1/2")		570765
	U 18" (3/4")		570770
	U 20" (3/4")		570775
	U 25" (3/4")		570780
	U 32 (1 1/4")		570785
Geberit Mapress C-STÄHL	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Geberit Mapress Edelstahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Geberit Mapress Edelstahl Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (P R-2B)	Z1	574530
Geberit Mapress Kupfer	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
Geberit Mapress Kupfer Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Geberit Mepla	G 16*		570400
	G 20*		570410
	G 26*		570420
	G 32		570430
	G 40		570440
	G 50		570450
	G 63 (PZ-S)		572470
Geberit Mepla Therm	G 16*		570400
	G 20*		570410
	G 26*		570420
Geberit Volex	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
General Fittings 5T00	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
General Fittings Serie 5S00	U 32		570785
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 18*		570340
	H 20*		570350
General Fittings Trident	H 25*		570360
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
General Fittings Trident Gas	B 16*		570850
	F 16*		570717
	F 16 45° (PR-2B)	Z1	574550
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
Giacomini Raccordi RM Giacomini	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 32		570785
	TH 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
Giacomini RM MULTIGAS	TH 26*		570475
	TH 32		570480
	TH 40		570485
	U 16*		570765
	U 20*		570775
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	H 16*		570320

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Giacomini Valvole Giacomini serie R850V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Golan Pipe Systems (Scandinavia) Alu-Press	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1½" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
GS Wärmesysteme System TH	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
GS Wärmesysteme System V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
H			
HakaGerodur HAKASAN	TH 10*		570467
	TH 11,6*		570482
	TH 12*		570452
	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
HASTINIK Hastinik/Hitpress	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
heima24	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
HELIROMA Klimapress	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
HELIROMA romapress	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
	RFz 16*		571325
	RFz 20*		571330
Henco	RFz 25		571335
	RFz 32		571340
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
Herotec TEMPUS-PRESS PLUS	TH 20*		570470
	TH 26*		570475
	HE 32		571900
	HEz 40		571904
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	U 16*		570765
HERZ PIPEFIX	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
	TH 10*		570467
	TH 16*		570460
HIDRONIX MULTIGAS	TH 20*		570470
	TH 26*		570475
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
HIDRONIX MULTIPIPE	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785
HIDRONIX UNICO	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785
HITEC Sistema Multistrato	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
hp praski BAVARIA-press	TH 10*		570467
	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
IBP >B< Flex	U 16*		570765
	U 25*		570780
	U 32		570785
IBP >B< Press	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
IBP >B< Press Carbon	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
IBP >B< Press Gas	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
IBP >B< Press Inox	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IBP >B< Press Solar	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
IBP >B< Press XL	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
ICMA Sempiter	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
ICMA Sempigas	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
Idrosanitaria Bonomi Homegas	TH 32		570480
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
Idrosanitaria Bonomi Idropress	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
IDROSISTEMI Ta-Press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	H 16*		570320
	H 20*		570350
IDROTRADE Storm Multipinza	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	U 16*		570765
	U 20*		570775
	U 40		570790
	U 50		570795
IDROTRADE Storm Multistrato	H 14*		570310
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IDROTRADE StormPRES	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
IDROTRADE StormSTEEL	M 54 (PR-3S)	Z2	572708
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
ILTA INOX/CHIBRO Pressfitting Cuni	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z2	579101
	M 88,9 G XL (PR-3S)	Z2	579110
	M 108,0 G XL (PR-3S)	Z2	579111
ILTA INOX/CHIBRO Pressfitting inox	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
Instantor Press System	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
Instantor Copper Press Metric	M 76,1 XL (PR-3S)	Z2	579101
	M 88,9 G XL (PR-3S)	Z2	579110
	M 108,0 G XL (PR-3S)	Z2	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
IPA IPANA Press	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
IPA THu IPANA Press	M 15		570110
	M 22		570130
	M 28		570140
	TH 10*		570467
	TH 11,6*		570482
	TH 12*		570452
IPALPEX (Industrie du Plastique et Accessoires)	TH 14*		570455
	TH 15*		570457
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 22*		570472
	TH 25*		570495
	TH 26*		570475
	TH 28		570477
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	K16/P18*		572600
	PF 22*		571980
	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
IPLEX K1 (Gas)	K1/40		572620
	K1/50		572625
	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	Iplex K2		572610
ISOLTUBEX ISOLPEX IPERT	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFIz 25		571337
	RFIz 32		571342
	RFz 16*		571325
ISOLTUBEX Multicapa	RFz 18*		571327
	RFz 20*		571330
	RFIz 25		571337
	RFIz 32		571342
	U 16*		570765
	U 18*		570770
ISOLTUBEX Multicapa GAS	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
ISOTUBI NUMEPRESS	U 63 (PZ-S)		572365
	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFIz 25		571337
	RFIz 32		571342
IVAR ALPEX-GAS	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
IVAR Ivar-Press	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z2	579101
	M 88,9 G XL (PR-3S)	Z2	579110
	M 108,0 G XL (PR-3S)	Z2	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
IVAR MULTI PRESS GAS	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	B 20		570860
	B 26		570870
	B 32		570880
IVAR MULTI PRESS GAS ITALIA	B 14*		570845
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	U 32		570785

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IVAR Multi Press MP	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
IVAR Multi Press Leak (MPL)	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
IVAR Plastic Multi Press PMP	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IVT Edelstahl-Presssystem	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
IVT PRIPRESS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
J			
Jäger - Aquatec Aquadress H	H 14*		570310
	H 16*		570320
	H 17*		570330
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
Jäger - Aquatec C-Stahl - Press Typ M	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
Jäger - Aquatec Edelstahl - Press Typ M	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
Jäger - Aquatec Kupfer - Press Typ V	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Jäger - Aquatec Jansen AG JANSEN prima	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
Jaraflex-Presssystem	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
JUNGWOO JWPress	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
JUNGWOO JWPress	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
JUNGWOO JWPress	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
K			
KAN KAN-therm Press	U 16* U 20* U 25* C 26* U 32 U 40 TH 50 (PZ-S) TH 63 (PZ-S)		570765 570775 570780 570750 570785 570790 572400 572405
KAN KAN-therm Press LBP	U 14* U 16* U 20* U 25* C 26* U 32 U 40 TH 14* TH 16* TH 20* TH 25* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570760 570765 570775 570780 570750 570785 570790 570455 570460 570470 570495 570475 570480 570485 572400 572405
KAN KAN-therm Inox	M 12 M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35 M 42 (PZ-4G) M 54 (PZ-4G) M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 12 45° (PR-2B) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570100 570110 570120 570130 570140 570150 570160 570170 572706 572708 579101 579110 579111 574520 574522 574524 574526 574528 574530
KAN KAN-therm Steel	M 12 M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35 M 42 (PZ-4G) M 54 (PZ-4G) M 42 (PR-3S) M 54 (PR-3S) XP 66,7 XL (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 12 45° (PR-2B) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570100 570110 570120 570130 570140 570150 570160 570170 572706 572708 579108 579101 579110 579111 574520 574522 574524 574526 574528 574530
KE KELIT KELIT KELOX	U 16* U 18* U 20* U 25* U 32 U 40 U 50 U 63 (PZ-S) U 63 (PR-3B) U 75 (PR-3B)		570765 570770 570775 570780 570785 570790 570795 572365 572837 572828
KE KELIT COPPERFIX Kupfer	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570110 570120 570130 570140 570150 572706 572708 579101 579110 579111 574522 574524 574526 574528 574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KE KELIT steelFIX C-Stahl	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570110 570120 570130 570140 570150 572706 572708 579101 579110 579111 574522 574524 574526 574528 574530
KE KELIT steelFIX Edelstahl	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570110 570120 570130 570140 570150 572706 572708 579101 579110 579111 574522 574524 574526 574528 574530
KEMBLA KemPress (AUS)	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm) VAU 32 (OD 31,8 mm) VAU 40 (OD 38,1 mm) VAU 50 (OD 50,8 mm)		572687 572689 572691 572693 572695 572697
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm) VAU 32 (OD 31,8 mm) VAU 40 (OD 38,1 mm) VAU 50 (OD 50,8 mm)		572687 572689 572691 572693 572695 572697
KISAN Kisan KD	KI 16* KI 20* KI 25* TH 16* TH 20* TH 25*		571360 571370 571375 570460 570470 570495
KISAN Kisan WL	KI 16* KI 20* KI 25* KI 32 TH 16* TH 20* TH 25* TH 32		571360 571370 571375 571380 570460 570470 570495 570480
KISAN Kisan WM	KI 16* KI 20* KI 25* KI 32		571360 571370 571375 571380
KISAN Kisan WR	U 20* U 25* U 32 U 40 U 50 U 63 (PZ-S) U 75 (PR-3B) TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570775 570780 570785 570790 570795 572365 572828 570470 570495 570480 570485 572400 572405
KISAN Kistal C	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570110 570120 570130 570140 570150 572706 572708 579101 579110 579111 574522 574524 574526 574528 574530

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KISAN Kistal Inox	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
KME cuprotherm CTX	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
KME Q-Tec - Comap SkinPress	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
KME Q-Tec - Oventrop Cofit	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670
L			
LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
LK Systems LK >B<Press	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
LK Systems LK >B<Press Elförzinkat	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
LK Systems LK >B<Press Gas	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
M			
MAINCOR MAINPRESS	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 16*		570765
MAINCOR MAINFLOR	U 20*		570775

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Mair Heiztechnik M-Press	H 11,5*		570315
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
Ma.s.ter System PRESSMASTER	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 14*		570760
	U 16*		570765
	U 18*		570770
Meier Tobler Metalplast - Stramax	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 63 (PR-3B)		572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
METALGRUP Permatubo	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
METALGRUP PexGrup	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
METALGRUP MultiGrup	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
Mueller Industries Streamline PRS	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
MULTITHERM PRESSSYSTEM	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	RFz 16*		571325
Multicapas Industrial AIS PEX	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 16*		570765
	U 18*		570770
Multicapas Industrial multitubo systems MC	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 63 (PR-3B)		572837
	U 75 (PR-3B)	Z4	572828

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Multicap Industrial multitubo systems MM	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
N			
NEUTHERM MEKUPRESS-HT	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
NIBCO (USA) Press System Copper	U 40		570790
	VUS ½" (OD 15,9mm)		571770
	VUS ¾" (OD 22,2mm)		571775
	VUS 1" (OD 28,6mm)		571780
	VUS 1½" (OD 34,9mm)		571785
	VUS 1¾" (OD 41,3mm)		571790
Nicolli Fluxo	VUS 2" (OD 54,0mm)		571795
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
NUPI Industrie Italiane Multinupi	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Nussbaum Optifit-Press	VMP ¾" (OD 17,2 mm)		571740
	VMP ½" (OD 21,3 mm)		571762
	VMPz ¼" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1½" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Nussbaum Optiflex-Flowpress	VRX 16		571750
	VRX 20		571752
	VRX 25		571754
	VRX 32		571756
	VRX 40		571758
	VRX 50		571760
	VRX 63		571797
Nussbaum Optipress Aquaplus	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B)	Z5	572815
	VFz 76,1 (PR-3B)	Z5	572816
	VFz 88,9 (PR-3B)	Z5	572817
	VFz 108,0 (PR-3B)	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
Nussbaum Optipress-Gaz	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B)	Z5	572815
Nussbaum Optipress-Therm	VFz 76,1 (PR-3B)	Z5	572816
	VFz 88,9 (PR-3B)	Z5	572817
	VFz 108,0 (PR-3B)	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B)	Z5	572815
	VFz 76,1 (PR-3B)	Z5	572816
	VFz 88,9 (PR-3B)	Z5	572817
	VFz 108,0 (PR-3B)	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
O			
O.M.T. - Press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
Oventrop Cofit P	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670
	H 32 A		570680
	H 40 A		570690
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Oventrop Cofit PD	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Oventrop	H 16 A*		570620
Cofit PDK	H 20 A*		570650
Oventrop	H 16 A*		570620
Cofit PD-HT	H 20 A*		570650
	H 25 A*		570660
	H 32 A		570680
Oventrop	H 16 A*		570620
Cofit PDK-HT	H 20 A*		570650
P			
PBTub	RFz 12*		571320
SERTIPRESS	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
PBTub	M 15		570110
SERTI-STEEL	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pegler Yorkshire	M 12		570100
XPress Carbon	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pegler Yorkshire	M 12		570100
XPress Copper	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pegler Yorkshire	M 15		570110
XPress Copper	M 18 ¹⁾		570120
Gas	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
Pegler Yorkshire	M 15		570110
XPress	M 18 ¹⁾		570120
Stainless	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pegler Yorkshire	M 15		570110
XPress Stainless	M 18 ¹⁾		570120
Gas	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
PERFEXIM	U 16*		570765
PERFEKT	U 20*		570775
SYSTEM	U 25*		570780
	U 32		570785
PERFILTUBO	U 16*		570765
PERFILALUPEX	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
PERFILTUBO	M 15		570110
PERFILPRESS	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
PEXTUBE	RFz 16*		571325
PexTube	RFz 20*		571330
	RFIz 25		571337
	RFIz 32		571342
Pipelife	M 15		570110
C-PRESS	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pipelife	TH 16*		570460
RADOPRESS	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
Pipetec Connect	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
PLASTICA ALFA	TH 16*		570460
Multipex	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLASTICA ALFA	TH 16*		570460
Multipex Air	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLASTICA ALFA	TH 16*		570460
Multipexalfa Gas	TH 20*		570470
	TH 26*		570475
PLASTICA ALFA	TH 16*		570460
Multipexalfa Gas protek	TH 20*		570470
	TH 26*		570475
PLASTICA ALFA	TH 16*		570460
Multipex Plus	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLASTICA ALFA	TH 16*		570460
Multipex Thermo	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLASTICA ALFA	TH 16*		570460
Multipex Thermo Plus	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLÁSTICOS	U 16*		570765
FERRO	U 20*		570775
FERROPLAST	U 25*		570780
GF MC PRESS	U 32		570785
Pressfitting MULTICAPA			
PLÁSTICOS	U 16*		570765
FERRO	U 20*		570775
FERROPLAST	U 25*		570780
GF PPSU	U 32		570785
Pressfitting PE-X y MULTICAPA			
PLÁSTICOS	RFz 16*		571325
FERRO	RFz 20*		571330
FERROPLAST	RFz 25		571335
GF PRESS	RFz 32		571340
Pressfitting PE-X			
PLUMBING PLUS	K16/P18*		572600
EZIPEX Crimp (AUS)	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625
PLUMBING PLUS	K16/P18*		572600
EZIPEX Gas (AUS)	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		572687
EZIPRESS Gas (AUS)	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841
	VAU 15 45° (PR-2B) (OD 12,7 mm)	Z1	574540
	VAU 20 45° (PR-2B) (OD 19,1 mm)	Z1	574542
	VAU 25 45° (PR-2B) (OD 25,4 mm)	Z1	574544

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
PLUMBING PLUS EZIPRESS Solar (AUS)	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 15 45° (PR-2B) (OD 12,7 mm)	Z1	574540
	VAU 20 45° (PR-2B) (OD 19,1 mm)	Z1	574542
PLUMBING PLUS EZIPRESS Water (AUS)	VAU 25 45° (PR-2B) (OD 25,4 mm)	Z1	574544
	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
	VAUFz 65 (PR-3B)		572839
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841
	VAU 15 45° (PR-2B) (OD 12,7 mm)	Z1	574540
	VAU 20 45° (PR-2B) (OD 19,1 mm)	Z1	574542
	VAU 25 45° (PR-2B) (OD 25,4 mm)	Z1	574544
POLYPIPE POLYSURE	TH 10*		570467
	TH 15*		570457
	TH 22*		570472
	TH 28		570477
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
POLYSAN- C-Stahl-Press- System M	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
POLYSAN- Edelstahl Press-System 1.4520	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
POLYSAN- Edelstahl Press-System Gas	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
POLYSAN- Edelstahl Press-System Wasser	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
POLYSAN- Press-System	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
POLYSAN-Henco- Press-System	TH 26*		570475
	HE 32		571900
	HEz 40		571904
POLYSAN (España) „Rainbow“	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Prandelli Multyrama Pf	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
Prandelli Multyrama Pfm	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	U 16*		570765
	U 18*		570770
	U 20*		570775
PURMO Cleverfit Radial	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
POLYSAN- Edelstahl Press-System Wasser	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 25		570920

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

1) Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled “M 88.9 G” or “M 108 G” on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
R			
Raccorderie Metalliche aesPRES ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
Raccorderie Metalliche inoxPRES ¹⁾	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
Raccorderie Metalliche MARINEPRES ¹⁾	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
Raccorderie Metalliche steelPRES ¹⁾	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
RBM Tita-fix	M 18 45° (PR-2B)	Z1	574524
	F 20 45° (PR-2B)	Z1	574552
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
Redi Nicoll Fluxo Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
RIFENG U PRESS FITTING (F5)	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
RIFENG TH PRESS FITTING (F9)	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	RFz 12*		571320
	RFz 16*		571325
RIQUIER A SERTIR	RFz 20*		571330
	RFz 25		571335
Roth PressCheck	RN 14*		572672
	RN 16		572670
	RN 17*		572674
	RN 20*		572676
	RN 25/26		572678
	RN 32		572680
	RN 40 (PR-3S)	Z2	572714
	RN 50 (PR-3S)	Z2	572716
	RNz 63 (PR-3B)	Z4	572836
Roth Ibérica Rothapress	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
Rubinetteria Bresciane Bonomi TURBO INOX	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
Rubinetteria Bresciane Bonomi TURBO INOX GAS	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Rubinetteria Bresciane Bonomi TURBO PRESS GAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
Rubinetteria Bresciane Bonomi TURBO STEEL	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
Rubinetteria Bresciane Bonomi TURBO PRESS	M 35 45° (PR-2B)	Z1	574530
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
Rubinetteria Bresciane Bonomi TURBO PRESS GAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
Sa.MI plastic Multistrato Gas	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16*		570460
S			
Sa.MI plastic	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16*		570460
Multistrato Gas	TH 20*		570470
	TH 26*		570475
	TH 32		570480

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA 3fit-Press Pb-free Serie 25000	B 16*		570850	SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		570935
	B 20*		570860		SA 18		570940
	B 26		570870		SA 22		570945
	B 32		570880		SA 28		570950
	F 16*		570717		SA 35		570955
	F 20*		570727		M 15		570110
	F 26*		570730		M 18		570120
	F 32		570735		M 22		570130
	Fz 40		570742		M 28		570140
	Fz 50		570747		M 35		570150
	F 63 (PZ-S)		572385		M 42 (PR-3S)	Z2	572706
	F 16 45° (PR-2B)	Z1	574550		M 54 (PR-3S)	Z2	572708
	F 20 45° (PR-2B)	Z1	574552		XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	F 26 45° (PR-2B)	Z1	574554		M 15 45° (PR-2B)	Z1	574522
	F 32 45° (PR-2B)	Z1	574556		M 18 45° (PR-2B)	Z1	574524
	H 16*		570320		M 22 45° (PR-2B)	Z1	574526
	H 20*		570350		M 28 45° (PR-2B)	Z1	574528
	H 26*		570370		M 35 45° (PR-2B)	Z1	574530
	H 32		570380		V 15		570115
	H 40 (PZ-4G)		570390		V 18		570125
	TH 16*		570460		V 22		570135
	TH 20*		570470		V 28		570145
	TH 26*		570475		V 35		570155
	TH 32		570480		V 42		570165
	TH 40		570485		V 54		570175
	TH 50 (PZ-S)		572400		V 15 45° (PR-2B)	Z1	574504
	TH 63 (PZ-S)		572405		V 18 45° (PR-2B)	Z1	574506
	U 16*		570765		V 22 45° (PR-2B)	Z1	574508
	U 20*		570775		V 28 45° (PR-2B)	Z1	574510
	C 26*		570750		V 35 45° (PR-2B)	Z1	574512
	U 32		570785	SANHA-NiroSan- Presssystem Serie 9000	SA 15		570935
	U 40		570790		SA 18		570940
	U 50		570795		SA 22		570945
	U 63 (PR-3B)	Z4	572837		SA 28		570950
	U 63 (PZ-S)		572365		SA 35		570955
SANHA 3fit-Press PPSU Serie 35000	B 16*		570850		M 15		570110
	B 20*		570860		M 18		570120
	B 26		570870		M 22		570130
	B 32		570880		M 28		570140
	F 16*		570717		M 35		570150
	F 20*		570727		M 42 (PR-3S)	Z2	572706
	F 26*		570730		M 54 (PR-3S)	Z2	572708
	F 32		570735		XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	F 16 45° (PR-2B)	Z1	574550		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	F 20 45° (PR-2B)	Z1	574552		M 15 45° (PR-2B)	Z1	574522
	F 26 45° (PR-2B)	Z1	574554		M 18 45° (PR-2B)	Z1	574524
	F 32 45° (PR-2B)	Z1	574556		M 22 45° (PR-2B)	Z1	574526
	H 16*		570320		M 28 45° (PR-2B)	Z1	574528
	H 20*		570350		M 35 45° (PR-2B)	Z1	574530
	H 26*		570370		V 15		570115
	H 32		570380		V 18		570125
	TH 16*		570460		V 22		570135
	TH 20*		570470		V 28		570145
	TH 26*		570475		V 35		570155
	TH 32		570480		V 42		570165
	TH 40		570485		V 54		570175
	TH 50 (PZ-S)		572400		V 15 45° (PR-2B)	Z1	574504
	TH 63 (PZ-S)		572405		V 18 45° (PR-2B)	Z1	574506
	U 16*		570765		V 22 45° (PR-2B)	Z1	574508
	U 20*		570775		V 28 45° (PR-2B)	Z1	574510
	C 26*		570750		V 35 45° (PR-2B)	Z1	574512
	U 32		570785	SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935
SANHA-NiroSan Gas Presssystem Serie 17000	SA 15		570935		SA 18		570940
	SA 18		570940		SA 22		570945
	SA 22		570945		SA 28		570950
	SA 28		570950		SA 35		570955
	SA 35		570955		M 15		570110
	M 15		570110		M 18		570120
	M 18		570120		M 22		570130
	M 22		570130		M 28		570140
	M 28		570140		M 35		570150
	M 35		570150		M 42 (PR-3S)	Z2	572706
	M 42 (PR-3S)	Z2	572706		M 54 (PR-3S)	Z2	572708
	M 54 (PR-3S)	Z2	572708		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522		M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524		M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526		M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528		M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530		M 35 45° (PR-2B)	Z1	574530
	V 15		570115		V 15		570115
	V 18		570125		V 18		570125
	V 22		570135		V 22		570135
	V 28		570145		V 28		570145
	V 35		570155		V 35		570155
	V 42		570165		V 42		570165
	V 54		570175		V 54		570175
	V 15 45° (PR-2B)	Z1	574504		V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506		V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508		V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510		V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512		V 35 45° (PR-2B)	Z1	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA NiroTherm Serie 91000	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
SANHA NiroTherm Industry Serie 98000	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
SANHA-Press Chrom Serie 16000	SA 12		570930
	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 28 45° (PR-2B)	Z1	574510

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		570930
	SA 14		570932
	SA 15		570935
	SA 16		570937
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 14		570112
	VG 14		570132
	V 15		570115
	V 16		570117
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	VG 14 45° (PR-2B)	Z1	574536
	V 15 45° (PR-2B)	Z1	574504
	VG 16 45° (PR-2B)	Z1	574538
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
SANHA-Press Pressfittings Serie 6000	SA 12		570930
	SA 14		570932
	SA 15		570935
	SA 16		570937
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 14		570112
	VG 14		570132
	V 15		570115
	V 16		570117
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	VG 14 45° (PR-2B)	Z1	574536
	V 15 45° (PR-2B)	Z1	574504
	VG 16 45° (PR-2B)	Z1	574538
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	SANHA-Therm Serie 24000	SA 12		570930
	SA 15		570935		SA 15		570935
	SA 18		570940		SA 18		570940
	SA 22		570945		SA 22		570945
	SA 28		570950		SA 28		570950
	SA 35		570955		SA 35		570955
	M 12		570100		M 12		570100
	M 15		570110		M 15		570110
	M 18		570120		M 18		570120
	M 22		570130		M 22		570130
	M 28		570140		M 28		570140
	M 35		570150		M 35		570150
	M 42 (PR-3S)	Z2	572706		M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708		M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101		M 12 45° (PR-2B)	Z1	574520
	M 12 45° (PR-2B)	Z1	574520		M 15 45° (PR-2B)	Z1	574522
	M 15 45° (PR-2B)	Z1	574522		M 18 45° (PR-2B)	Z1	574524
	M 18 45° (PR-2B)	Z1	574524		M 22 45° (PR-2B)	Z1	574526
	M 22 45° (PR-2B)	Z1	574526		M 28 45° (PR-2B)	Z1	574528
	M 28 45° (PR-2B)	Z1	574528		M 35 45° (PR-2B)	Z1	574530
	M 35 45° (PR-2B)	Z1	574530		V 12		570107
	V 12		570107		V 15		570115
	V 15		570115		V 18		570125
	V 18		570125		V 22		570135
	V 22		570135		V 28		570145
	V 28		570145		V 35		570155
	V 35		570155		V 42		570165
	V 42		570165		V 54		570175
	V 54		570175		V 12 45° (PR-2B)	Z1	574502
	V 12 45° (PR-2B)	Z1	574502		V 15 45° (PR-2B)	Z1	574504
	V 15 45° (PR-2B)	Z1	574504		V 18 45° (PR-2B)	Z1	574506
	V 18 45° (PR-2B)	Z1	574506		V 22 45° (PR-2B)	Z1	574508
	V 22 45° (PR-2B)	Z1	574508		V 28 45° (PR-2B)	Z1	574510
	V 28 45° (PR-2B)	Z1	574510		V 35 45° (PR-2B)	Z1	574512
	V 35 45° (PR-2B)	Z1	574512	SANHA-Therm Industry Serie 28000	SA 12		570930
SANHA PURAPRESS Serie 8000	SA 12		570930		SA 15		570935
	SA 14		570932		SA 18		570940
	SA 15		570935		SA 22		570945
	SA 16		570937		SA 28		570950
	SA 18		570940		SA 35		570955
	SA 22		570945		M 12		570100
	SA 28		570950		M 15		570110
	SA 35		570955		M 18		570120
	M 12		570100		M 22		570130
	M 15 ¹⁾		570110		M 28		570140
	M 18 ¹⁾		570120		M 35		570150
	M 22 ¹⁾		570130		M 42 (PR-3S)	Z2	572706
	M 28 ¹⁾		570140		M 54 (PR-3S)	Z2	572708
	M 35 ¹⁾		570150		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 42 (PR-3S)	Z2	572706		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107
	M 54 (PR-3S)	Z2	572708		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100		M 12 45° (PR-2B)	Z1	574520
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108		M 15 45° (PR-2B)	Z1	574522
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107		M 18 45° (PR-2B)	Z1	574524
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101		M 22 45° (PR-2B)	Z1	574526
	M 12 45° (PR-2B)	Z1	574520		M 28 45° (PR-2B)	Z1	574528
	M 15 45° (PR-2B)	Z1	574522		M 35 45° (PR-2B)	Z1	574530
	M 18 45° (PR-2B)	Z1	574524		V 12		570107
	M 22 45° (PR-2B)	Z1	574526		V 15		570115
	M 28 45° (PR-2B)	Z1	574528		V 18		570125
	M 35 45° (PR-2B)	Z1	574530		V 22		570135
	V 12		570107		V 28		570145
	V 14		570112		V 35		570155
	VG 14		570132		V 42		570165
	V 15		570115		V 54		570175
	V 16		570117		V 12 45° (PR-2B)	Z1	574502
	VG 16		570137		V 15 45° (PR-2B)	Z1	574504
	V 18		570125		V 18 45° (PR-2B)	Z1	574506
	V 22		570135		V 22 45° (PR-2B)	Z1	574508
	V 28		570145		V 28 45° (PR-2B)	Z1	574510
	V 35		570155		V 35 45° (PR-2B)	Z1	574512
	V 42		570165	SANITOP PERMATUBO INOX	M 15		570110
	V 54		570175		M 18 ¹⁾		570120
	V 12 45° (PR-2B)	Z1	574502		M 22		570130
	VG 14 45° (PR-2B)	Z1	574536		M 28 ¹⁾		570140
	V 15 45° (PR-2B)	Z1	574504		M 35		570150
	VG 16 45° (PR-2B)	Z1	574538		M 35 (PR-3S)	Z2	572727
	V 18 45° (PR-2B)	Z1	574506		M 42 (PR-3S)	Z2	572706
	V 22 45° (PR-2B)	Z1	574508		M 54 (PR-3S)	Z2	572708
	V 28 45° (PR-2B)	Z1	574510		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	V 35 45° (PR-2B)	Z1	574512		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
					M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
					M 15 45° (PR-2B)	Z1	574522
					M 18 45° (PR-2B)	Z1	574524
					M 22 45° (PR-2B)	Z1	574526
					M 28 45° (PR-2B)	Z1	574528
					M 35 45° (PR-2B)	Z1	574530

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANPRO THPRESS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
SATEC SK ViTerm	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
Schütz duo-flex tri-o-flex	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 25*		570495
Schwer Fittings AQUApress	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Seppelfricke VSH SudoPress C-Stahl Visu-Control	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Seppelfricke VSH SudoPress Edelstahl Visu-Control	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Seppelfricke VSH SudoPress Kupfer Visu-Control	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Seppelfricke VSH SudoPress Kupfer Gas Visu-Control	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Seppelfricke VSH SudoPress Kupfer Solar Visu-Control	V 15		570115
	V 18		570125
	V 22		570135
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
Seppelfricke VSH XPress C-Stahl	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Seppelfricke VSH XPress Edelstahl	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Seppelfricke VSH XPress Kupfer	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
Seppelfricke VSH XPress Kupfer Gas	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
SESTA SESTA GAS	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
SESTA Sistema multistrato	H 16*		570320
	H 20*		570350
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
SIGMA LI Premium	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
SLOVARM PEX-THERM	U 16*		570765
	U 20*		570775
	H 26*		570370
	U 32		570785
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
STANDARD HIDRAULICA MultiStandard	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
STELBI Polikraft	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	H 16*		570320
	H 20*		570350
	H 26*		570370
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
STELBI Stelgas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
STPC STPEX	TH 16* TH 20* TH 26*		570460 570470 570475
System Ewoprex	H 16* H 20* H 26* H 32 TH 16* TH 20* TH 26* TH 32 U 16* U 20* U 32		570320 570350 570370 570380 570460 570470 570475 570480 570765 570775 570785
System WELCO-Gas	H 16 A* H 20 A* H 26 A* H 32 A		570620 570650 570670 570680
System WOPREX	H 14 A* H 16 A* H 17 A* H 20 A* H 26 A* H 32 A H 40 A (PZ-4G)		570610 570620 570630 570650 570670 570680 570695
T			
TDM BRASS Serie 1600	H 16* H 18* H 20* H 25* H 26* H 32 TH 16* TH 18* TH 20* TH 25* TH 26* THL 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) U 16* U 18* U 20* U 25* C 26* U 32		570320 570340 570350 570360 570370 570380 570460 570465 570470 570495 570475 570487 570485 572400 572405 570765 570770 570775 570780 570750 570785
TDM BRASS Serie 1700 gas	TH 16* TH 20* TH 26* THL 32		570460 570470 570475 570487
TermoConcept TC-PRESS	Basic E01 ¹⁾		571855
THERMOLUTZ	H 14* H 16* TH 20*		570310 570320 570470
TE-SA TE-SA press serie 800	TH 14* TH 16* TH 18* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570455 570460 570465 570470 570475 570480 570485 572400 572405
TIEMME AL-COBRAPEX Serie 1650	TH 14* TH 16* TH 18* TH 20* TH 25* TH 26* THL 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) THz 75 (PR-3B)		570455 570460 570465 570470 570495 570475 570487 570485 572400 572405 572829
TIEMME Serie 1700 PE-X a pressare	RFz 12* RFz 16* RFz 20* RFz 25 RFz 32	Z4	571320 571325 571330 571335 571340
TIEMME TIEMME Gas	TH 16* TH 20* TH 26* THL 32		570460 570470 570475 570487

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
TIGRE ALPEX GÁS	TH 16* TH 20* TH 26* TH 32		570460 570470 570475 570480
TKM Systemtechnik	TH 14* TH 16* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570455 570460 570470 570475 570480 570485 572400 572405
TRA MULTITRAPRESS	U 16* U 18* U 20* U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S)	Z4	570765 570770 570775 570780 570785 570790 570795 572837 572365
TRA TRAPRESS	H 12* H 16* H 20* H 25* H 32 RFz 12* RFz 16* RFz 20* RFz 25 RFz 32		570300 570320 570350 570360 570380 571320 571325 571330 571335 571340
TUBIPLAST ITALY MULTILAYER PIPE	TH 16* TH 18* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) H 16* H 18* H 20* H 26* H 32 U 16* U 18* U 20* C 26* U 32		570460 570465 570470 570475 570480 570485 572400 572405 570320 570340 570350 570370 570380 570765 570770 570775 570750 570785
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16* TH 18* TH 20* TH 26* TH 32		570460 570465 570470 570475 570480
TWEETOP	U 16* U 20* U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) U 75 (PR-3B)	Z4 Z4	570765 570775 570780 570785 570790 570795 572837 572365 572828
U			
UNICAL AG MAX-MULTIPEX	U 16* U 20* H 26* C 26* U 32		570765 570775 570370 570750 570785
UNIDELTA DeltaI	TH 16* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) H 16* H 20* H 26* H 32 H 40 (PZ-4G) U 16* U 20* U 32 U 40 U 50 U 63 (PZ-S)		570460 570470 570475 570480 570485 572400 572405 570320 570350 570370 570380 570390 570765 570775 570785 570790 570795 572365

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
UNIDELTA DeltAll GAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	U 32		570785
Uponor MLC	UP 14*		572630
	UP 16*		572632
	UP 18*		572634
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
Uponor MLC-D	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Uponor MLC-G ³⁾	UP 20 ³⁾		572636
	UP 25		572638
	UP 32		572640
Uponor S-Press PLUS	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
Uponor Uni Pipe PLUS	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
V			
Valsir Bravopress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 32 V		570685
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
Valsir PEXAL	H 14*		570310
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 32 V		570685
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
Van Marcke NV Tubipex	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Van Marcke NV Tubipress	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
Variotherm System TH	TH 11,6*		570482
	TH 16*		570460
	TH 20*		570470
VESBO VPREMIUM	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
Viega Fonterra	VX 12*		571630
	VP 14/15*		570905
	VP 16/17*		570910
	VP 20*		570915
	VP 25		570920
Viega Megapress	VMP ¾" (OD 17,2 mm)		571740
	VMP ½" (OD 21,3 mm)		571762
	VMPz ¾" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega Megapress S	VMP ¾" (OD 17,2 mm)		571740
	VMP ½" (OD 21,3 mm)		571762
	VMPz ¾" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega Megapress S XL	VMP 2½" XL (PR-3B) (OD 76,1 mm)	Z7 XL 45 kN ⁴⁾	579112 R
	VMP 3" XL (PR-3B) (OD 88,9 mm)	Z7 XL 45 kN ⁴⁾	579113 R
	VMP 4" XL (PR-3B) (OD 114,3 mm)	Z7 XL 45 kN ⁴⁾	579114 R
Viega Pexfit	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viega Pexfit G	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viega Prestabo	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817
	VFz 108,0 (PR-3B) ⁶⁾	Z5	572818
	V 12 45° (PR-2B)	Z1	574502
Viega Profipress	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 12		570107
	VG 14		570132
	V 15		570115
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
V 54	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817
	VFz 108,0 (PR-3B) ⁶⁾	Z5	572818
	V 12 45° (PR-2B)	Z1	574502
	VG 14 45° (PR-2B)	Z1	574536
	V 15 45° (PR-2B)	Z1	574504
	VG 16 45° (PR-2B)	Z1	574538
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega Profipress G	V 12		570107
	VG 14		570132
	V 15		570115
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) [®]	Z5	572815
	V 12 45° (PR-2B)	Z1	574502
	VG 14 45° (PR-2B)	Z1	574536
	V 15 45° (PR-2B)	Z1	574504
	VG 16 45° (PR-2B)	Z1	574538
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
V 35 45° (PR-2B)	Z1	574512	
Viega Profipress S	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
V 35 45° (PR-2B)	Z1	574512	
Viega Profipress Therm	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
V 22 45° (PR-2B)	Z1	574508	
Viega ProPress System USA	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
Viega Propress WATER System AUS	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
Viega PropressG GAS System AUS	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
Viega Raxinox	VRX 16		571750
	VRX 20		571752
Viega Raxofix	VRX 16		571750
	VRX 20		571752
	VRX 25		571754
	VRX 32		571756
	VRX 40		571758
	VRX 50		571760
Viega Sanfix ²⁾	VRX 63		571797
	VP 16/17 ²⁾		570910
	VP 20 ²⁾		570915
	VP 25 ²⁾		570920
Viega Sanfix Fosta ²⁾	VP 32		570925
	VP 16/17 ²⁾		570910
	VP 20 ²⁾		570915
	VP 25 ²⁾		570920
Viega Sanfix Fosta ²⁾	VP 32		570925

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega Sanpress	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VR 76,1 (PR-3B) ^{§)}	Z5	572822
	VR 88,9 (PR-3B) ^{§)}	Z5	572823
	VR 108,0 (PR-3B) ^{§)}	Z5	572824
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Viega Sanpress Inox	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ^{§)}	Z5	572815
	VFz 76,1 (PR-3B) ^{§)}	Z5	572816
	VFz 88,9 (PR-3B) ^{§)}	Z5	572817
	VFz 108,0 (PR-3B) ^{§)}	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Viega Sanpress Inox G	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ^{§)}	Z5	572815
	VFz 76,1 (PR-3B) ^{§)}	Z5	572816
	VFz 88,9 (PR-3B) ^{§)}	Z5	572817
	VFz 108,0 (PR-3B) ^{§)}	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Viega Smartpress	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viessmann	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
Vogel & Noot EASYTEC	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
VSH MultiPress	U 14*		570760
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow. Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

4) Driven by REMS Akku-Press XL 45kN 22V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
VSH SudoPress Carbon	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
V 35 45° (PR-2B)	Z1	574512	
VSH SudoPress Copper	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
V 16 45° (PR-2B)	Z1	574534	
V 18 45° (PR-2B)	Z1	574506	
V 22 45° (PR-2B)	Z1	574508	
V 28 45° (PR-2B)	Z1	574510	
V 35 45° (PR-2B)	Z1	574512	
VSH SudoPress Copper Gas	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
VSH SudoPress Stainless	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
V 28 45° (PR-2B)	Z1	574510	
V 35 45° (PR-2B)	Z1	574512	
VSH XPress Carbon	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
VSH XPress Copper	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
M 28 45° (PR-2B)	Z1	574528	
M 35 45° (PR-2B)	Z1	574530	
VSH XPress Copper GAS	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
VSH XPress Stainless	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapler tongs	Art.-No.	
VSH XPress Stainless Gas	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
W				
Watts MTR Art press	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
WATTS RADIANT Watts WaterPEX	US ¾**		571450	
	US ½**		571455	
	US ¾**		571460	
	US 1**		571465	
	US 1 ¼"		571470	
	US 1 ½"		571475	
WATTS RADIANT Watts RadiantPEX	US ¾**		571450	
	US ½**		571455	
	US ¾**		571460	
	US 1**		571465	
	US 1 ¼"		571470	
	US 1 ½"		571475	
WATTS RADIANT Watts RadiantPEX-AL	U 16 (½")		570765	
	U 20 (¾")		570775	
	U 25 (¾")		570780	
	U 32 (1")		570785	
	U 14*		570760	
	U 16*		570765	
	U 20*		570775	
Wavin Tigris K1/M1	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PR-3B)	Z4	572837	
	U 63 (PZ-S)		572365	
	U 75 (PR-3B)	Z4	572828	
	Wavin Tigris K5/M5	U 14*		570845
		U 16*		570850
		U 20*		570860
		U 32		570880
		U 40		570310
U 50			570320	
U 63 (PR-3B)			570350	
U 63 (PZ-S)			570360	
U 75 (PR-3B)			570380	
U 14*			570390	
U 16*			570455	
U 20*			570460	
U 25*			570470	
U 32			570495	
U 40			570480	
U 50			570485	
U 63 (PR-3B)		Z4	570760	
U 63 (PZ-S)			570765	
U 75 (PR-3B)		Z4	570775	
UP 14*			570780	
UP 16*		570785		
UP 20*		570790		
UP 25		570795		
UP 32		572837		
UP 40		572365		
UP 50		572828		
UP 63 (PR-3B)		572630		
UP 63 (PZ-S)		572632		
UP 75 (PR-3B)		572636		
UP 14*		572638		
UP 16*		572640		
WeeConPress Alu	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 12 45° (PR-2B)	Z1	574520	
	M 15 45° (PR-2B)	Z1	574522	
	M 18 45° (PR-2B)	Z1	574524	
	M 22 45° (PR-2B)	Z1	574526	
	M 28 45° (PR-2B)	Z1	574528	
	M 35 45° (PR-2B)	Z1	574530	
	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 12 45° (PR-2B)	Z1	574502	
	V 15 45° (PR-2B)	Z1	574504	
	V 18 45° (PR-2B)	Z1	574506	
	V 22 45° (PR-2B)	Z1	574508	
	V 28 45° (PR-2B)	Z1	574510	
	V 35 45° (PR-2B)	Z1	574512	
	SA 12		570930	
	SA 15		570935	
SA 18		570940		
SA 22		570945		
SA 28		570950		
SA 35		570955		
SA 42 (PR-3S)	Z1	572710		
SA 54 (PR-3S)	Z1	572712		

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WeeConPress C-Stahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
WeeConPress Inox	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
WeeConPress Kupfer	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
WeeConFlex MVR	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
WEM	U 16*		570765
WIELAND cuprotherm CTX ²⁾	TH 14 ²⁾		570455
	TH 16 ²⁾		570460
	TH 18 ²⁾		570465
	TH 20 ²⁾		570470
	TH 26 ²⁾		570475
WKS-Press	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WÜRTH Würth	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	HE 32		571900
X			
XtraConnect	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
(DN 26)	U 20*		570775
	U 25*		570780
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 32		570925
Z			
Zetaesse	TH 14*		570455
Multistrato	TH 16*		570460
EUROPEX	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
Zetaesse	TH 14*		570455
Multistrato ISOPEX	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
ZEWOTHERM	TH 12*		570452
Zewo Press Premium	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
ZEWOTHERM	TH 16*		570460
Zewo Press PPSU	TH 20*		570470
	TH 26*		570475
	TH 32		570480
ZURN	US ¾**		571450
INDUSTRIES ZURN PEX	US ½**		571455
	US ¾**		571460
	US 1**		571465
	US 1 ¼*		571470
	US 1 ½*		571475
	US 2"		571477

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

Accessories

For REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

Description	Art.-No.	
Adapter tongs Z1 for driving REMS pressing rings 45° (PR-2B)	574500	
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795	
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801	
Adapter tongs Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1½–2" (PR-3B), VUSFz 2½–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802	
Adapter tongs Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120	
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22 V ACC	579123	
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1¼")/cropping tongs and compartment for pipe cutter up to 42 mm	570295	
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40, H 40 A, VUS 1½", VUS 2")	570290	
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810	
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0–108.0/VR 76.1–108.0/ VUSFz 2½–4" (PR-3B)	572809	
Steel case with insert for adapter tongs Mini Z1 and adapter tongs Z1 and 6 REMS pressing rings V 12–35 45° (PR-2B) or M 12–35 45° (PR-2B) or F 16–32 45° (PR-2B)	574516	
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings 45° (PR-2B)	571136	
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½–4" XL (PR-3B)	571137	
XL-Boxx system case with inserts for 3 different pressing rings 64.0–108.0 XL (PR-3S) or 2½–4" XL (PR-3S)	579603	
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813	

